




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:
 1. MATERIAL
 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
 1.2 CONTACT MATERIAL:COPPER ALLOY

2. SPECIFICATION
 2.1 CURRENT RATING:1.0 Amp.
 2.2 INSULATION RESISTANCE:500MΩ Min.
 2.3 DIELECTRIC WITHSTANDING:300VAC.
 2.4 CONTACT RESISTANCE:50mΩ Max.
 2.5 OPERATING TEMPERATURE:-40°C TO+105°C.

Dimensions list

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	8.0	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

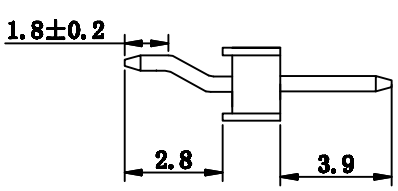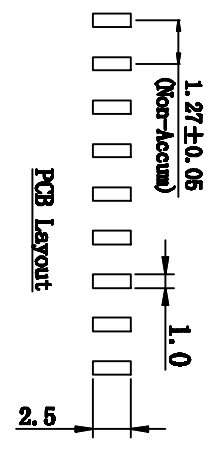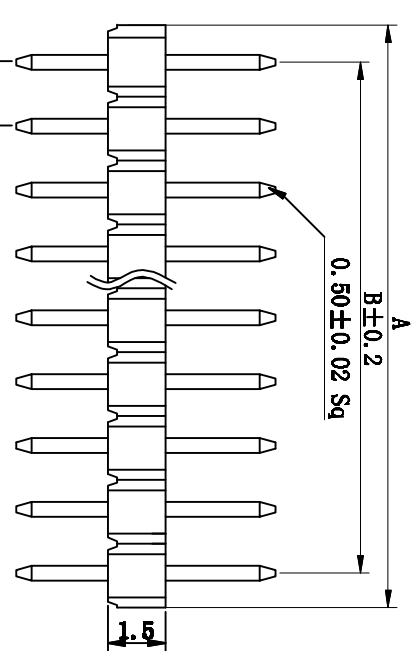

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°
DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET
	1 OF 1

PROJECTION

UNITS: mm

SHEET SIZE: A4

SERIES: LL1013-01G

TITLE: 1.27mm PITCH PIN HEADER SINGLE ROW S.M.T TYPE

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.