

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	


**SPECIFICATIONS**

Current Rating: 1Amps  
 Insulator Resistance: 500Megaohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40 ° ~ +105 °  
 Contact Material: Brass  
 Insulator Material: NY-6T  
 PLATING: GOLD FLASH

UNSPECIFIED TOLERANCE ±0.2

**Dimensions List**

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	1.27	0	1#21	26.67	26.40
1#2	2.54	1.27	1#22	27.94	26.67
1#3	3.81	2.54	1#23	29.21	27.94
1#4	5.08	3.81	1#24	30.48	29.21
1#5	6.35	5.08	1#25	31.75	30.48
1#6	7.62	6.35	1#26	33.02	31.75
1#7	8.89	7.62	1#27	34.29	33.02
1#8	10.16	8.89	1#28	35.56	34.29
1#9	11.43	10.16	1#29	36.83	35.56
1#10	12.70	11.43	1#30	38.10	36.83
1#11	13.97	12.70	1#31	39.37	38.10
1#12	15.24	13.97	1#32	40.64	39.37
1#13	16.51	15.24	1#33	41.91	40.64
1#14	17.78	16.51	1#34	43.18	41.91
1#15	19.05	17.78	1#35	44.45	43.18
1#16	20.32	19.05	1#36	45.72	44.45
1#17	21.59	20.32	1#37	46.99	45.72
1#18	22.86	21.59	1#38	48.26	46.99
1#19	24.13	22.86	1#39	49.53	48.26
1#20	25.40	24.13	1#40	50.80	49.53

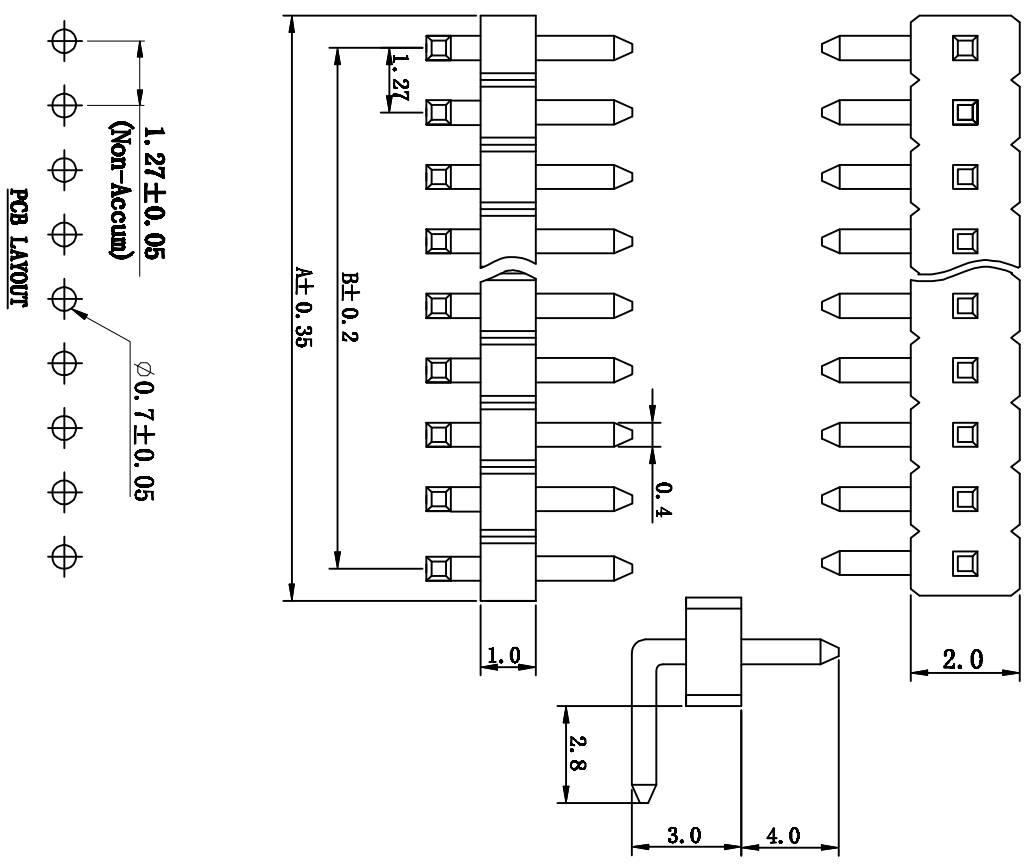

PCB LAYOUT

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	SCALE	DRAWING NO.	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED				
1	HOUSING		THERMOPLASTIC	UL 94 V-0				

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, ±0.60	X, ±5°	X, ±3°	±2°
.X ±0.38	.X ±3°	.XX ±2°	
.XX ±0.25			

PROJECTION	TITLE
UNITS: mm	1.27MM 1*40Pin Header 90°
SHEET SIZE: A4	SERIES: LL1013-01C

	<b>慈溪蓝翎电子有限公司</b> CIXI LANLING ELECTRONICS CO., LTD.
--	---