


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

TABLE B:

TYPE	Dimension	
	E	F
1	3.00	6.10
2	7.15	7.15
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

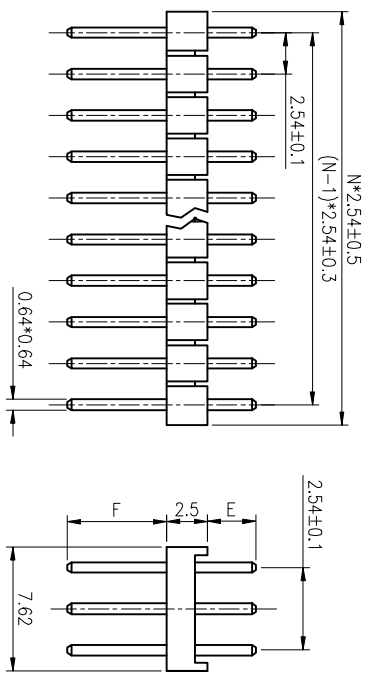

1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X	±0.80	X	±5°	mm	254mm PIN HEADER V/T TYPE
X	±0.38	X	±3°	A4	3 ROWS
.XX	±0.25	.XX	±2°		LL1009-3
DRAWING TYPE	CUSTOMER <th>SHEET</th> <td>1 OF 1 <th>TITLE</th> <td></td> </td>	SHEET	1 OF 1 <th>TITLE</th> <td></td>	TITLE	
SCALE	1:1 <th>SHEET</th> <td>1 OF 1 <th>SHEET SIZE</th> <td></td> </td>	SHEET	1 OF 1 <th>SHEET SIZE</th> <td></td>	SHEET SIZE	
DRAWING NO.		SHEET		SERIES	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.