

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	




**SPECIFICATIONS**

Current Rating: 1Amps  
 Insulator Resistance: 5000Mohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40 C ~+105° C  
 Contact Material: phosphor Bronze  
 Insulator Material: P146  
 Plating: Gold Flash

UNSPECIFIED TOLERANCE, ±0.20

**Dimensions list**

Contact's Per row	Dimensions		Contact's Per row	Dimensions	
	A	B		A	B
1	2.0	0	21	42.0	40.0
2	4.0	2.0	22	44.0	42.0
3	6.0	4.0	23	46.0	44.0
4	7.7	6.0	24	48.0	46.0
5	10.0	8.0	25	50.0	48.0
6	12.0	10.0	26	52.0	50.0
7	14.0	12.0	27	54.0	52.0
8	16.0	14.0	28	56.0	54.0
9	18.0	16.0	29	58.0	56.0
10	20.0	18.0	30	60.0	58.0
11	22.0	20.0	31	62.0	60.0
12	24.0	22.0	32	64.0	62.0
13	26.0	24.0	33	66.0	64.0
14	28.0	26.0	34	68.0	66.0
15	30.0	28.0	35	70.0	68.0
16	32.0	30.0	36	72.0	70.0
17	34.0	32.0	37	74.0	72.0
18	36.0	34.0	38	76.0	74.0
19	38.0	36.0	39	78.0	76.0
20	40.0	38.0	40	80.0	78.0

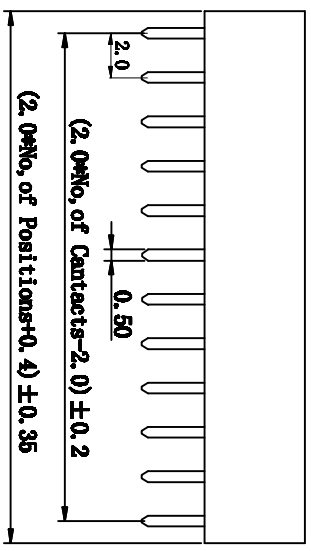

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, ±0.60	X, ±5°		
.X, ±0.38	.X, ±3°		
.XX, ±0.25	.XX, ±2°		
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION	UNIT	TITLE
1st P	mm	FRMULR BRADDER PITCH2.0mm 35mm
SHEET SIZE	A4	SERIES LL1017-2A
		1st P DIP 180° SINGLE BASE SINGLE ROW

**慈溪蓝翎电子有限公司**  
 CIXI LANLING ELECTRONICS CO., LTD.

1 2 3 4 5 6 7 8

