

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	CJJ 11/18/2014		CJJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- MATERIAL
  - INSULATOR: THERMOPLASTIC(UL 94V-0).
  - CONTACT: COPPER ALLOY.
- SPECIFICATION
  - TEMPERATURE: -40°C~+105°C.
  - CONTACT RESISTANCE: 20mΩ max.(initial).
  - INSULATION RESISTANCE: 1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PRODUCT NUMBER CODE:

LL1008 - X X X X - X

PLATING LEVEL(FOR GOLD ONLY) ⓑ

3A: 0.8-1.2u" AA: LEVEL AA

A: LEVEL A B: LEVEL B

HOUSING COLOR

B: BLACK  
W: WHITE  
L: BLUE  
A: GRAY

CONTACT PLATING


F1: FULL GOLD FLASH

MOUNTING TYPE

S: V/T TYPE  
R: R/A TYPE  
E: Elevator TYPE

No. OF CONTACTS

08 10 12 14 16 20 26  
30 34 40 50 60 64

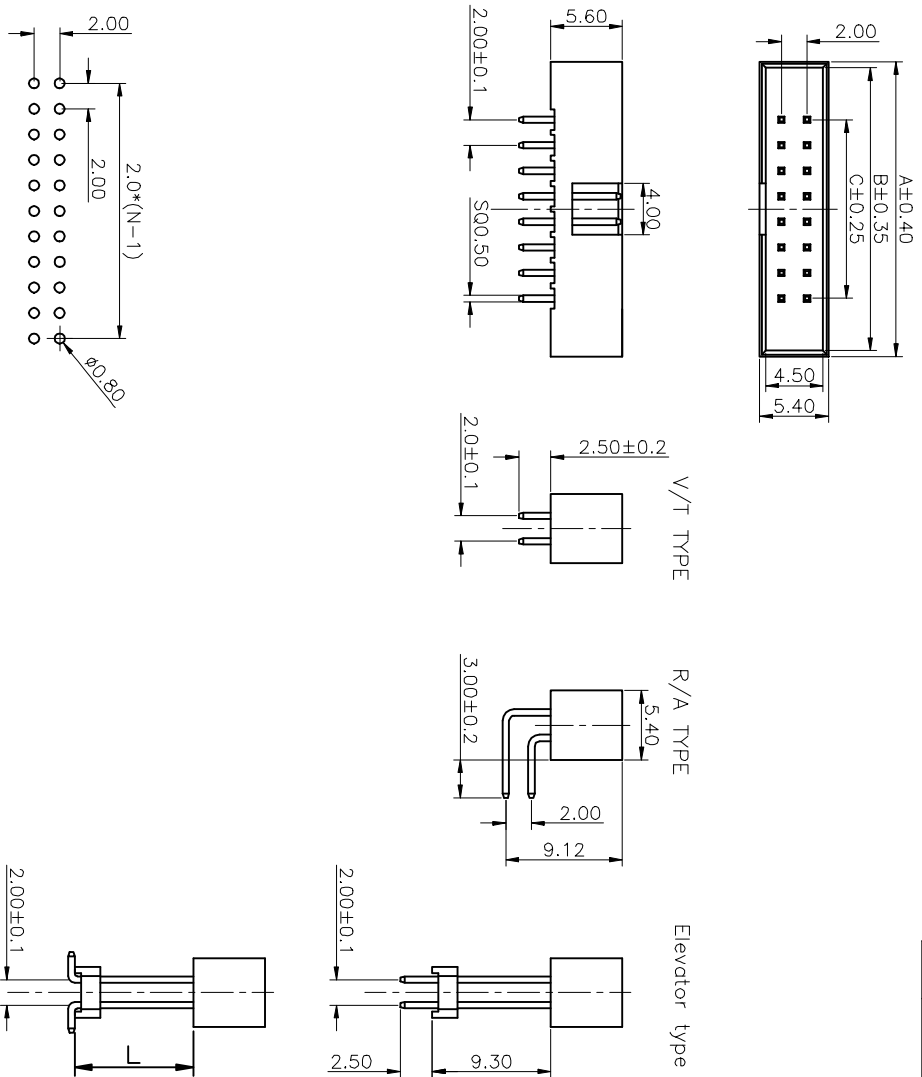

RECOMMEND PCB LAYOUT  
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.0mm BDX HEADER	
.X	±0.38	.X	±3°	SHEET SIZE	A4	S/T, R/A,ELEVATOR & SMT TYPE	
.XX	±0.25	.XX	±2°	SERIES LLI008-1A/1B/1D/1E			
DRAWING TYPE CUSTOMER				SCALE 1:1			
DRAWING NO.				SHEET 1 OF 1			



**慈溪蓝翎电子有限公司**  
CIXI LANLING ELECTRONICS CO., LTD.  
Tel: 86-574-63619026 Fax: 86-574-63617070