

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	CJJ 11/18/2014		CJJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

1. MATERIAL

- 1.1 INSULATOR: THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT: COPPER ALLOY.

2. SPECIFICATION

- 2.1 TEMPERATURE: -40°C~+105°C.
- 2.2 CONTACT RESISTANCE: 20mΩ max.(initial).
- 2.3 INSULATION RESISTANCE: 1000MΩ min.
- 2.4 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PRODUCT NUMBER CODE:

LL1008 - X X X X X - X


PLATING LEVEL(FOR GOLD ONLY) ②
 3A: 0.8-1.2u" AA: LEVEL AA
 A: LEVEL A B: LEVEL B

HOUSING COLOR
 B: BLACK
 W: WHITE
 L: BLUE
 A: GRAY

CONTACT PLATING
 FT: FULL GOLD FLASH

MOUNTING TYPE
 S: V/T TYPE
 R: R/A TYPE
 E: Elevator TYPE

No OF CONTACTS
 08 10 12 14 16 20 26
 30 34 40 50 60 64

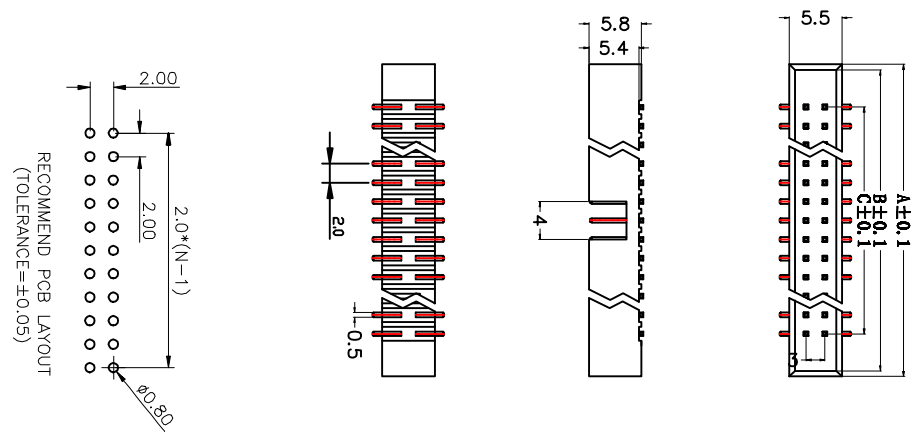

RECOMMEND PCB LAYOUT
 (TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1		
DRAWING NO.			

PROJECTION	TITLE
mm	BOX HEADER S.M.T
SHEET SIZE	PITCH 2.0mm
A4	LL1008-1C

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-63519035 Fax: 86-574-63517070

