


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

Technical Data

Insulator:Black glass filled polyester PPS-GF30-FR
 Flammability:UL 94V-0
 Sleeve:Brass CuZn36pb3
 Contact clip(4finger):Beryllium copper
 Mating pin:Φ0.41xΦ0.56mm
 Forces:(polished steel gaugeΦ0.43)
 Mechanical life:min 500 cycles
 Current rating: 3Amps/Contact max
 Contact resistance:max 10mΩ
 Dielectric strength:min 1000V/RMS

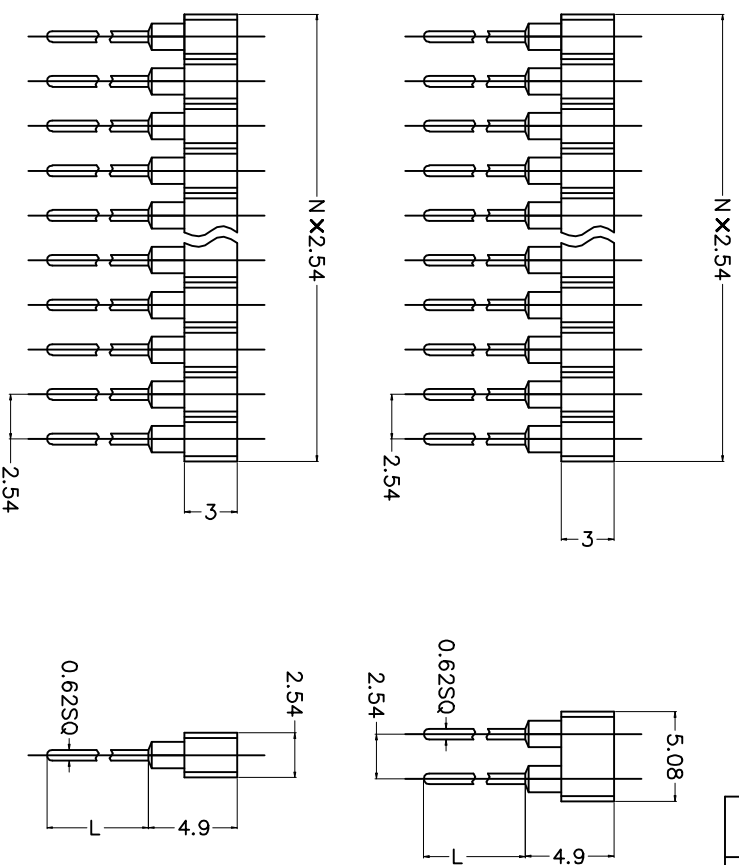

Overall Length	Length L
11.80 mm	6.6 mm
14.30 mm	9.4 mm
17.80 mm	12.90 mm

GENERAL TOLERANCE	ANGLE TOLERANCE
X ±0.60	X ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	Slp IC Socket Machine Pin
SHEET SIZE A4	SERIES LL1019-4A

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO.	

ITEM	PART NAME
1	HOUSING
2	CONTACT


慈溪蓝翎电子有限公司
 CI XI LANLING ELECTRONICS CO., LTD.