

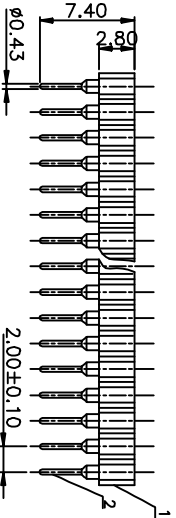


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

SINGLE ROW
N:NUMBER OF CONTACTS

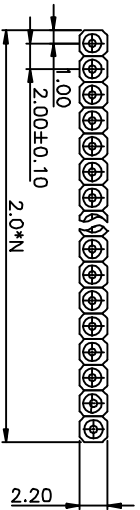

DUAL ROWS
N:NUMBER OF CONTACTS

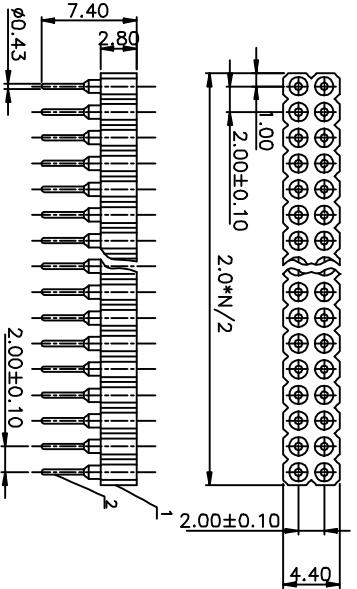

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20 MILLIOHMS Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000 MEGAOHMS Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

LL1019-8 - X X X X X



GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	mm	SIP IC SOCKET(SCREW PIN) PITCH2.00
X, ±0.38	X, ±3°	A4	SERIES LL1019-8
.XX, ±0.25	.XX, ±2°		

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	SCALE	DRAWING NO.	SHEET	1 OF 1
1	HOUSING		THERMOPLASTIC	UL 94 V-0	1:1			
2	CONTACT		COPPER ALLOY	GOLD PLATED				

1 2 3 4 5 6 7 8