


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

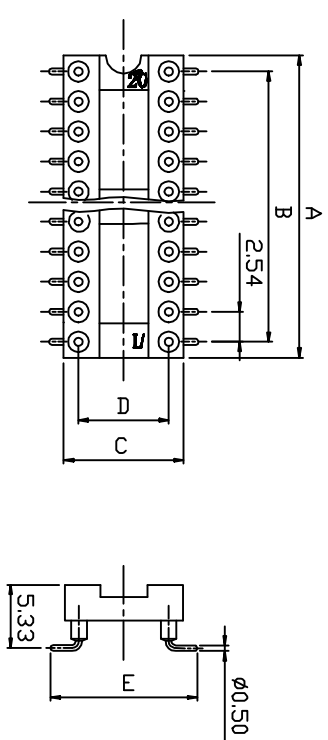

Position	Dimension		
	A±0.5	B±0.2	C
06	7.60	5.08	10.14
08	10.16	7.62	10.16
14	17.16	15.24	10.16
16	20.32	17.78	10.16
18	22.86	20.32	10.16
20	25.40	22.86	10.16
24	30.48	27.94	10.16
28	35.56	33.02	10.16
24	30.48	27.94	17.78
28	35.56	33.02	17.78
28	35.56	33.02	17.78
32	40.62	38.10	17.78
40	51.00	48.26	17.78


GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET
	1 OF 1

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
	SERIES
	LL1021-6

- Clip plating
- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"
- Pin plating
- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"
- Width
- N: 7.62mm
- W: 15.24mm
- No. of contacts
- 06 08 12 14 16 18
- 20 24 28 32 40

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
 - PRODUCT NUMBER CODE: LL1021-6 - X X X X

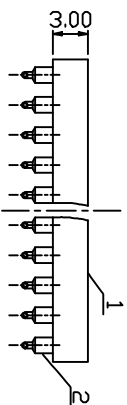

ITEM	PART NAME	PART NO.	MATERIALS	FINISHES	DRAWING NO.
2	CONTACT		COPPER ALLOY	GOLD PLATED	
1	HOUSING		THERMOPLASTIC	UL 94 V-0	
1	PART NAME		MATERIAS	FINISHED	

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.