

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

MATERIAL&FINISH

Insulator: PBT Glass Fiber (UL94V-0)

Contact : Brass

Contact : Gold-Plated Over Nickel.

SPECIFICATIONS

Current Rating : 1A AC, DC


Voltage Rating : 250V AC, DC

Temperature Range: -40° C To+105° C

Contact Resistance: 20mΩ Min

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 500V AC/Min

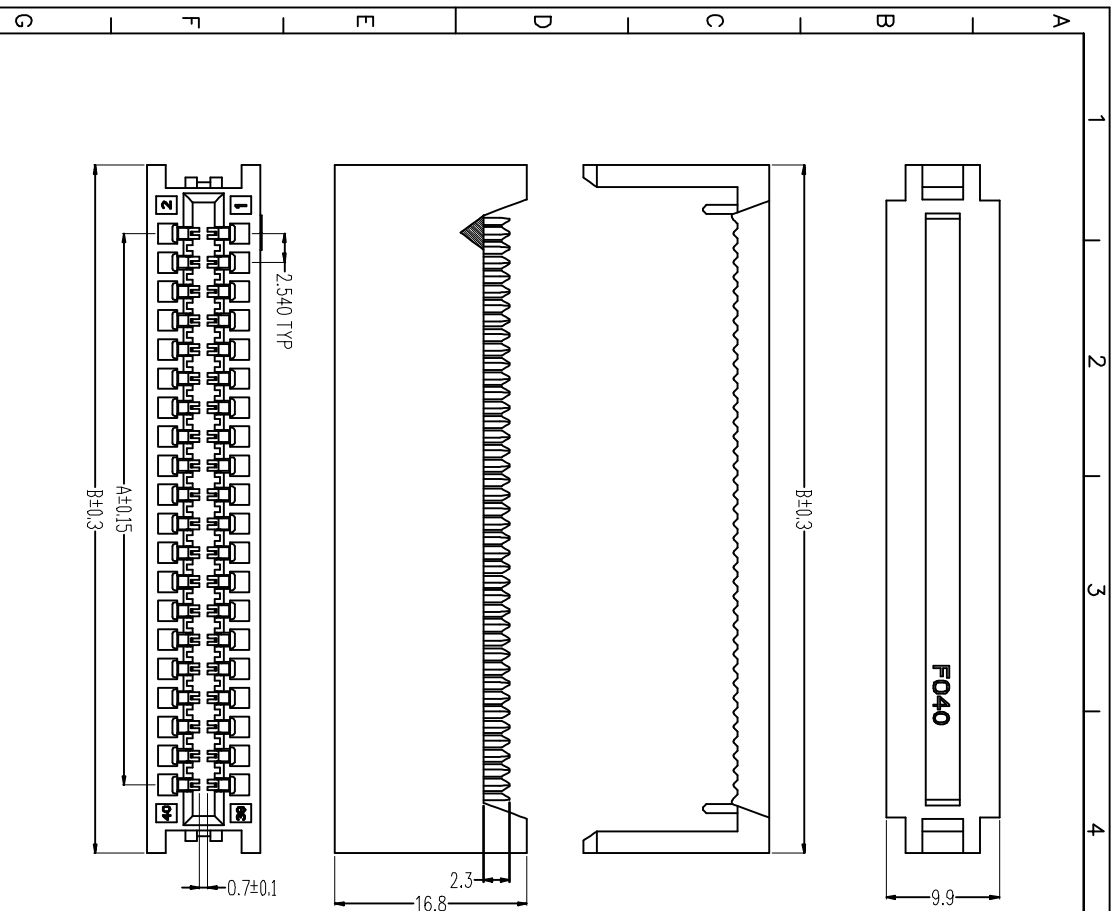

PART NO	A	B
CB-10P	10.16	22.03
CB-14P	15.24	27.10
CB-16P	17.78	29.60
CB-20P	22.86	34.80
CB-26P	30.48	42.40
CB-34P	40.64	52.60
CB-40P	48.26	60.22
CB-50P	60.96	72.90
CB-60P	73.66	85.43
CB-64P	78.74	90.51

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE
X	X	$\pm 5^\circ$
.X	.X	$\pm 3^\circ$
.XX	.XX	$\pm 2^\circ$

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS	2.54MM IDC CARD EDGE
SHEET SIZE	A4
SERIES	LL1038-6

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.